


### Ultra-compact and Slim DPDT Relay with the World's Smallest Mounting Area\*

- Dimensions of 4.8 x 10.3 x 9 mm (WxLxH) represent a reduction of approximately 55% in mounting area compared with the OMRON G6S, for higher-density mounting.
- Dielectric strength of 1,500 VAC and an impulse withstand voltage of 2,500 V for 2 x 10 μs (conforms to North American Telcordia specifications (formerly Bellcore)).
- Conforms to FCC Part 68 (i.e., impulse withstand voltage of 1,500 V for 10 x 160 μs between coil and contacts and between contacts of the same polarity).
- Single-winding latching models to save energy.
- Conforms to UL60950 (File No. E41515)/CSA C22.2 No. 60950 (File No. LR24825).

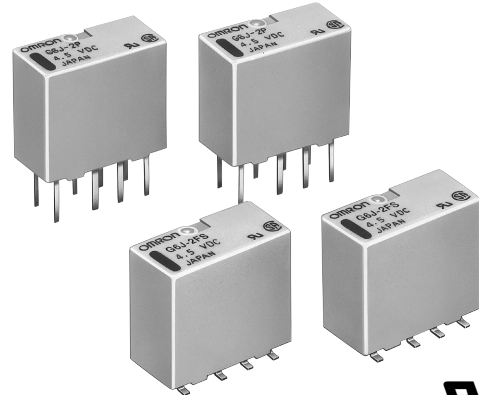

\* The world's smallest mounting area for mechanical relays for DPDT signal use, as determined by comparing the surface-mounting area for models with surface-mounting terminals (short) and models with PCB terminals (as of May 2001, from an OMRON survey).

## Ordering Information

Classification			Single-side stable	Single-winding latching	
DPDT	Plastic sealed	Through-hole terminal	G6J-2P	G6JU-2P	
		Surface mount terminal	Short	G6J-2FS	G6JU-2FS
			Long	G6J-2FL	G6JU-2FL

**Note:** 1. When ordering, add the rated coil voltage to the model number.

Example: G6J-2P 12 VDC  
└───Rated coil voltage

2. When ordering tape packing, add "-TR" to the model number.

Example: G6J-2P-TR 12 VDC  
└───Tape packing

Be sure since "-TR" is not part of the relay model number, it is not marked on the relay case.

### Model Number Legend:

**G6J**          
1 2 3

#### 1. Relay function

- None: Single-side stable relay
- U: Single-winding latching relay

#### 2. Contact form

- 2: DPDT

#### 3. Terminal shape

- P: PCB terminals
- FS: Surface-mounting terminals, short
- FL: Surface-mounting terminals, long

## Application Examples

Telephones, communications equipment, measurement devices, office automation machines, and audio-visual products.

# Specifications

## ■ Standard Specifications

**Contact mechanism:** Crossbar twin Ag (Au-alloy contact)

**Enclosure rating:** Plastic-sealed

## ■ Coil Ratings

**Single-side Stable Relays (G6J-2P, G6J-2FS, G6J-2FL)**

<b>Rated voltage</b>	3 VDC	4.5 VDC	5 VDC	12 VDC	24 VDC
<b>Rated current</b>	48.0 mA	32.1 mA	29.2 mA	12.2 mA	9.2 mA
<b>Coil resistance</b>	62.5 $\Omega$	140.4 $\Omega$	171.1 $\Omega$	979.8 $\Omega$	2,620 $\Omega$
<b>Must operate voltage</b>	75% max. of rated voltage				
<b>Must release voltage</b>	10% min. of rated voltage				
<b>Max. voltage</b>	150% of rated voltage				
<b>Power consumption</b>	Approx. 140 mW				Approx. 230 mW

- Note:**
1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of  $\pm 10\%$ .
  2. The operating characteristics are measured at a coil temperature of 23°C.
  3. The maximum voltage is the highest voltage that can be imposed on the Relay coil instantaneously.

**Single-winding Latching Relays (G6JU-2P, G6JU-2FS, G6JU-2FL)**

<b>Rated voltage</b>	3 VDC	4.5 VDC	5 VDC	12 VDC
<b>Rated current</b>	33.9 mA	21.7 mA	20.4 mA	9.2 mA
<b>Coil resistance</b>	88.5 $\Omega$	207.8 $\Omega$	245.3 $\Omega$	1,309 $\Omega$
<b>Must operate voltage</b>	75% max. of rated voltage			
<b>Must release voltage</b>	75% max. of rated voltage			
<b>Max. voltage</b>	150% of rated voltage			
<b>Power consumption</b>	Approx. 100 mW			

- Note:**
1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of  $\pm 10\%$ .
  2. The operating characteristics are measured at a coil temperature of 23°C.
  3. The maximum voltage is the highest voltage that can be imposed on the Relay coil instantaneously.

## ■ Contact Ratings

Load	Resistive load
<b>Rated load</b>	0.3 A at 125 VAC, 1 A at 30 VDC
<b>Rated carry current</b>	1 A
<b>Max. switching voltage</b>	125 VAC, 110 VDC
<b>Max. switching current</b>	1 A


## ■ Characteristics

Item		Single-side Stable Relays	Single-winding Latching Relays
		G6J-2P, G6J-2FS, G6J-2FL	G6JU-2P, G6JU-2FS, G6JU-2FL
Contact resistance (See note 1.)		100 mΩ max.	
Operating (set) time (See note 2.)		3 ms max. (approx. 1.3 ms)	3 ms max. (approx. 1.3 ms)
Release (reset) time (See note 2.)		3 ms max. (approx. 0.8 ms)	3 ms max. (approx. 1.3 ms)
Minimum set/reset signal width		---	10 ms min.
Insulation resistance (See note 3.)		1,000 MΩ min. (at 500 VDC)	
Dielectric strength	Coil and contacts	1,500 VAC, 50/60 Hz for 1 min	
	Contacts of different polarity	1,000 VAC, 50/60 Hz for 1 min	
	Contacts of same polarity	750 VAC, 50/60 Hz for 1 min	
Impulse withstand voltage	Coil and contacts	2,500 VAC, 2 x 10 μs	
	Contacts of different polarity	1,500 VAC, 10 x 160 μs	
	Contacts of same polarity		
Vibration resistance		Destruction: 10 to 55 Hz 2.5-mm single amplitude (5-mm double amplitude) Malfunction: 10 to 55 Hz 1.65-mm single amplitude (3.3-mm double amplitude)	
Shock resistance		Destruction: 1,000 m/s <sup>2</sup> (approx. 100G) Malfunction: 750 m/s <sup>2</sup> (approx. 75G)	
Life expectancy		Mechanical: 50,000,000 operations min. (at 36,000 operations/hour) Electrical: 100,000 operations min. (with a rated load at 1,800 operations/hour)	
Failure rate (P level) (See note 4.)		10 μA at 10 mVDC	
Ambient temperature		-40 to 85°C (with no icing or condensation)	
Ambient humidity		5% to 85%	
Weight		Approx. 0.8 g	


- Note:**
1. The contact resistance was measured with 10 mA at 1 VDC with a fall-of-potential method.
  2. Values in parentheses are actual values.
  3. The insulation resistance was measured with a 500-VDC Megger Tester applied to the same parts as those for checking the dielectric strength.
  4. This value was measured at a switching frequency of 120 operations/min.
  5. The above values are initial values.

# Engineering Data

## Max. Switching Capacity

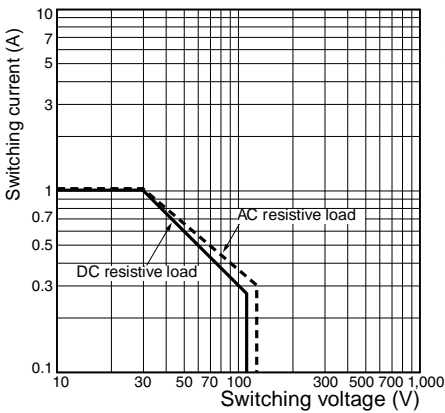


## Ambient Temperature vs. Maximum Voltage

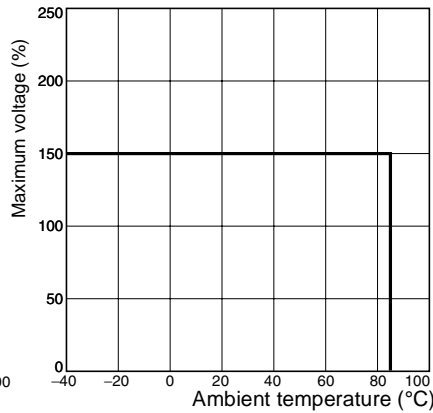


Note: "Maximum voltage" is the maximum voltage that can be applied to the Relay coil.


## Ambient Temperature vs. Switching Current

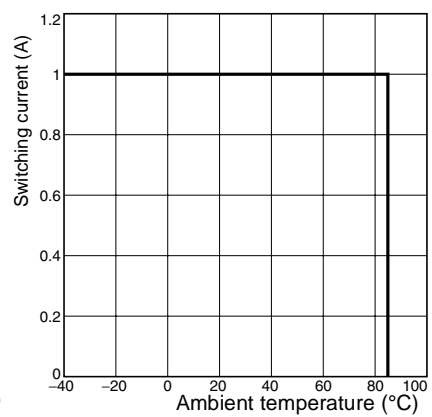


## Life Expectancy

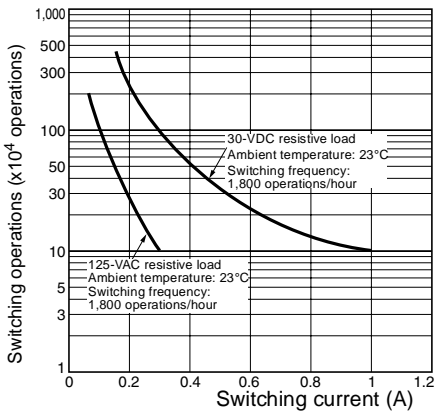

## Ambient Temperature vs. Must Operate or Must Release Voltage

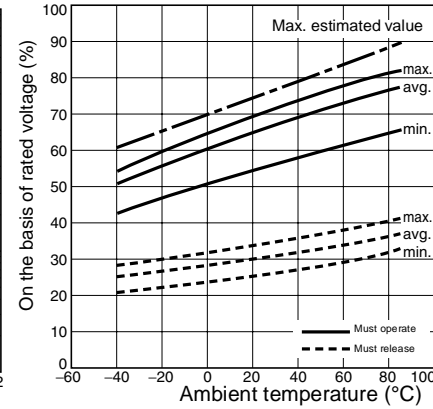


## Shock Malfunction

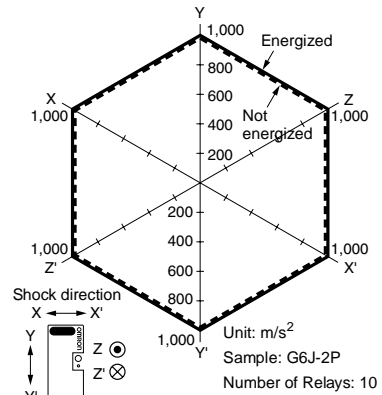


Conditions: Shock is applied in ±X, ±Y, and ±Z directions three times each with and without energizing the Relays to check the number of contact malfunctions.


## Electrical Life Expectancy (with Must Operate and Must Release Voltage) (See note.)

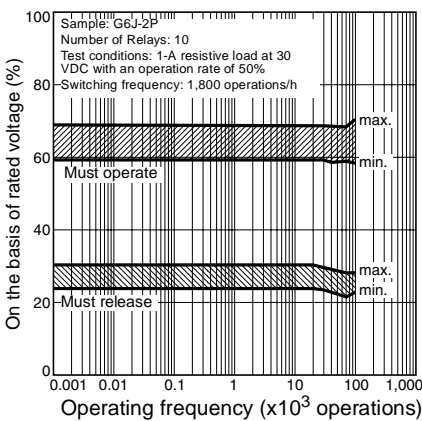

## Electrical Life Expectancy (Contact Resistance) (See note.)

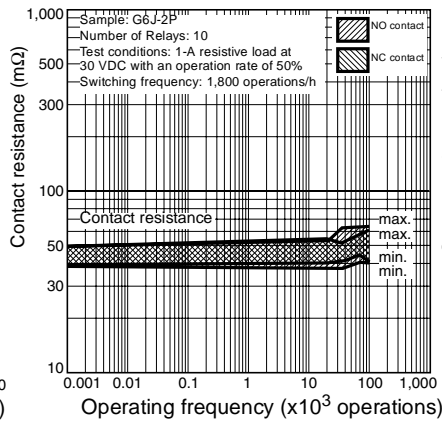


## Contact Reliability Test (See note.)

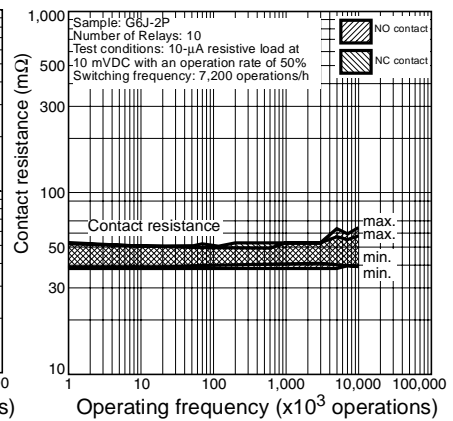


Note: The tests were conducted at an ambient temperature of 23°C.




Mutual Magnetic Interference

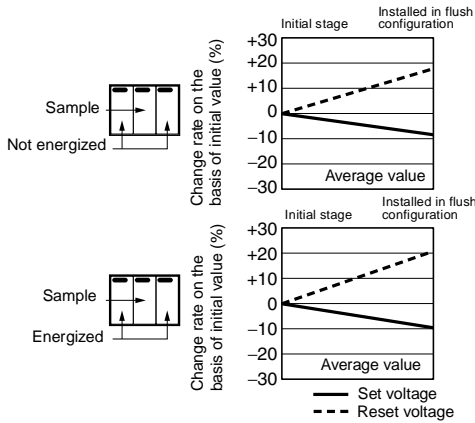


Mutual Magnetic Interference

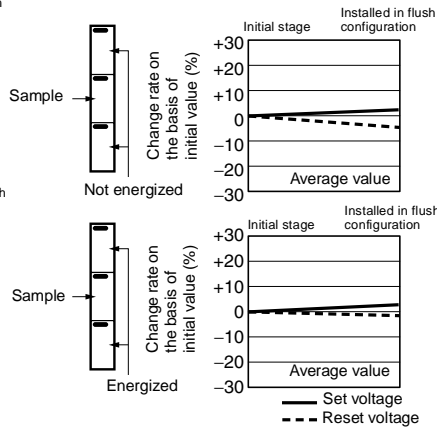


External Magnetic Interference

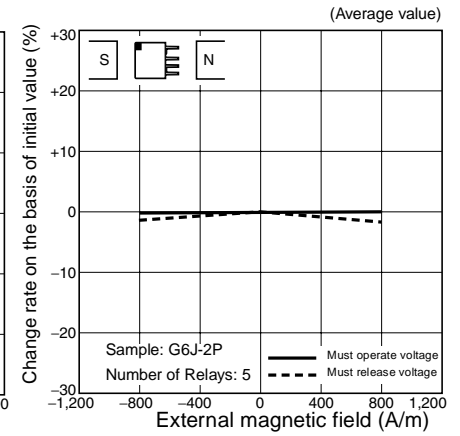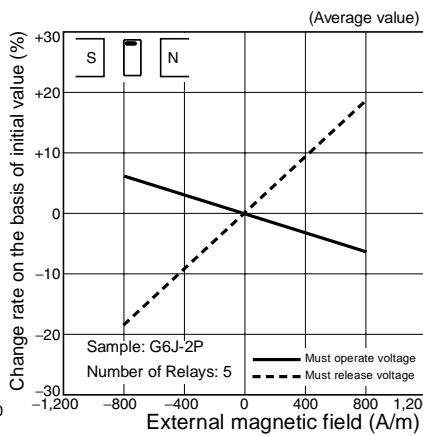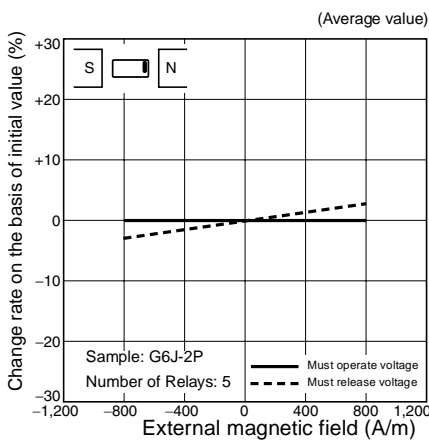


High-frequency Characteristics (Isolation)

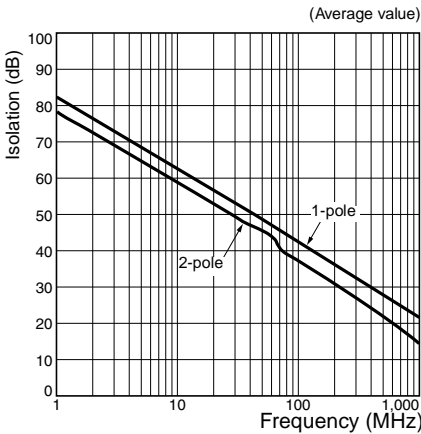


High-frequency Characteristics (Insertion Loss)

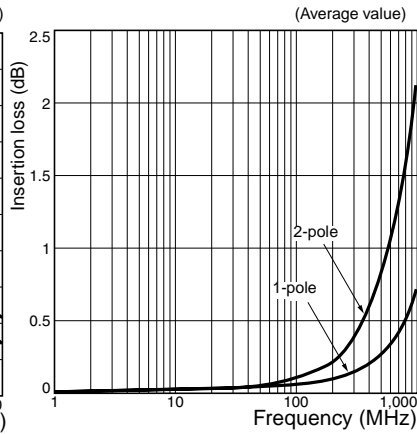


High-frequency Characteristics (Return Loss, V.SWR)

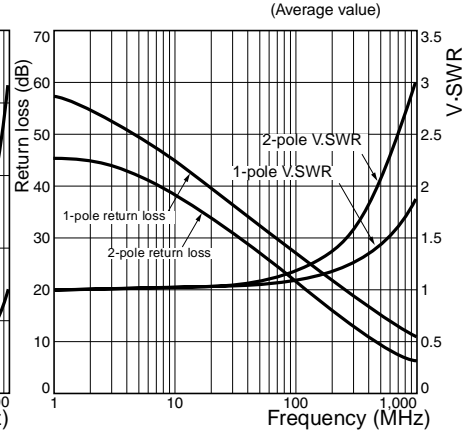


**Must Operate and Must Release Time Distribution (See note.)**

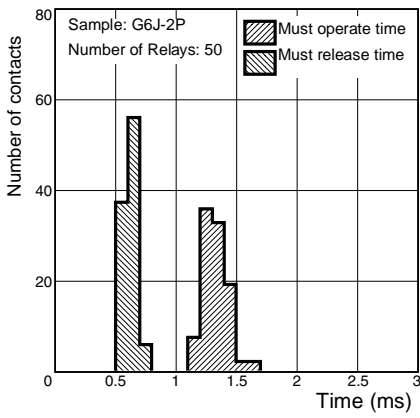

**Must Operate and Must Release Bounce Time Distribution (See note.)**

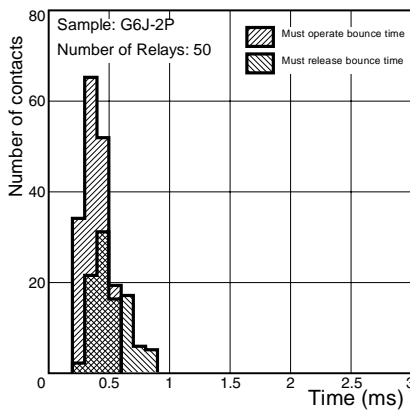

**Vibration Resistance**

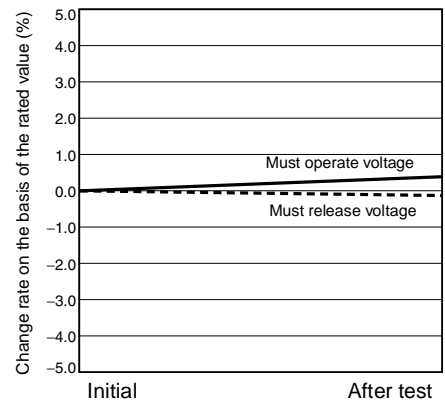

**Note:** The tests were conducted at an ambient temperature of 23°C.




# Stick Packing and Tape Packing

## 1. Stick Packing

Relays in stick packing are arranged so that the orientation mark of each Relay is on the left side.

Always confirm that the Relays are in the correct orientation when mounting the Relays to the PCBs.

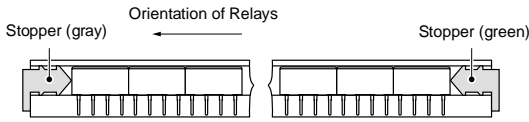

Stick length: 540 mm (stopper not included)

No. of Relays per stick: 50

## 2. Tape Packing (Surface-mounting Terminal Relays)


When ordering Relays in tape packing, add the prefix "-TR" to the model number, otherwise the Relays in stick packing will be provided.

Tape type: TB2412R (EIAJ (Electronic Industrial Association of Japan))


Reel type: R24D (EIAJ (Electronic Industrial Association of Japan))

Relays per reel: 500

### Direction of Relay Insertion


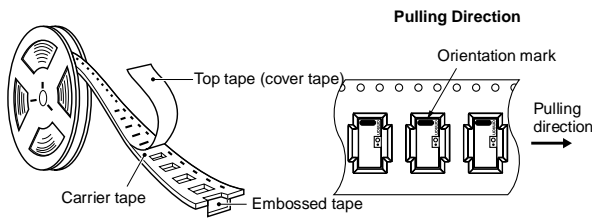


### Reel Dimensions


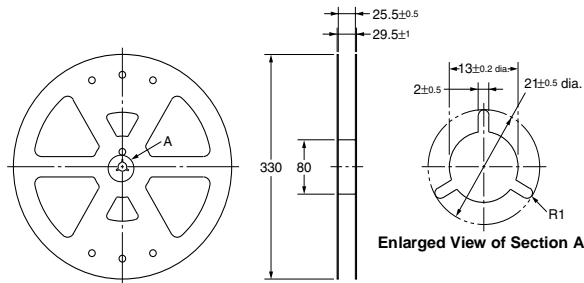


### Carrier Tape Dimensions

#### G6J-2FS, G6JU-2FS

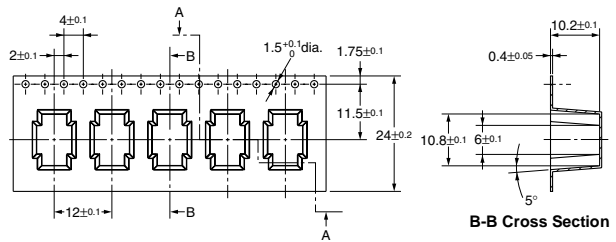


#### G6J-2FL, G6JU-2FL

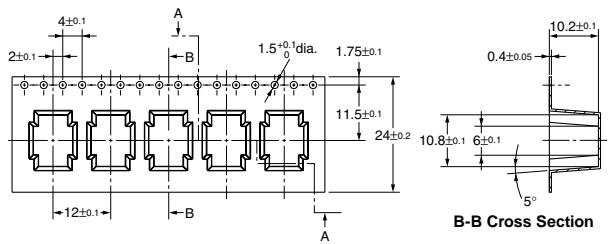



## Recommended Soldering Method

### IRS Method (for Surface-mounting Terminal Relays)

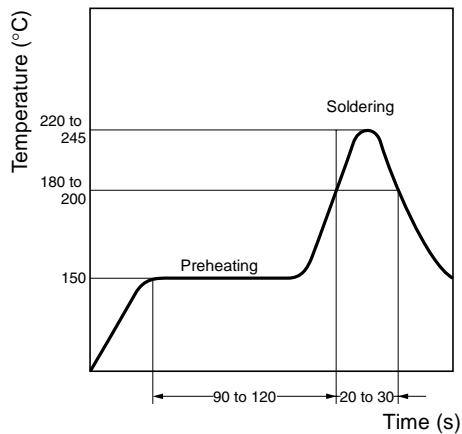

**Note:** Temperatures indicate the surface temperatures of the PCB

### ■ Approved Standards


UL approval: UL60950 (File No. E41515)

CSA approval: C22.2 No. 60950 (File No. LR24825)

Contact form	Coil rating	Contact rating	Number of test operations
DPDT	G6J-2P, 2FS, 2FL: 3 to 24 VDC G6JU-2P, 2FS, 2FL: 3 to 24 VDC	1 A at 30 VDC 0.5 A at 60 VDC 0.3 A at 125 VAC	6,000

- The thickness of cream solder to be applied should be between 150 and 200  $\mu\text{m}$  on OMRON's recommended PCB pattern.

- In order to perform correct soldering, it is recommended that the correct soldering conditions be maintained as shown below on the left-hand side.

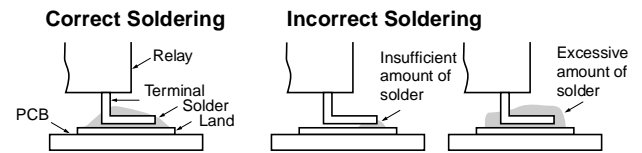

Visually check that the Relay is properly soldered.

## Precautions

For general precautions, refer to the *PCB Relay Catalog (X033)*. Familiarize yourself with the precautions and glossary before using the G6J.

### Correct Use

#### Handling

Leave the Relays packed until just prior to mounting them.

#### Soldering

Solder: JIS Z3282, H63A


Soldering temperature: Approx. 250°C (At 260°C if the DWS method is used.)

Soldering time: Approx. 5 s max. (Approx. 2 s for the first time and approx. 3 s for the second time if the DWS method is used.)

Be sure to adjust the level of the molten solder so that the solder will not overflow onto the PCB.

#### Claw Securing Force During Automatic Insertion


During automatic insertion of Relays, make sure to set the securing force of the claws to the following values so that the Relay characteristics will be maintained.



Direction A: 4.90 N max.

Direction B: 9.80 N max.

Direction C: 9.80 N max.

 Secure the claws to the area indicated by shading. Do not attach them to the center area or to only part of the Relay.

### Environmental Conditions During Operation, Storage, and Transportation

Protect the Relays from direct sunlight and keep the Relays under normal temperature, humidity, and pressure.

#### Mounting Latching Relays

Make sure that the vibration or shock that is generated from other devices, such as Relays in operation, on the same panel and imposed on the Latching Relays does not exceed the rated value, otherwise the Latching Relays that have been set may be reset or vice versa. The Latching Relays are reset before shipping. If excessive vibration or shock is imposed, however, the Latching Relays may be set accidentally. Be sure to apply a reset signal before use.

### Maximum Voltage

The maximum voltage of the coil can be obtained from the coil temperature increase and the heat-resisting temperature of coil insulating sheath material. (Exceeding the heat-resisting temperature may result in burning or short-circuiting.) The maximum voltage also involves important restrictions which include the following:

- Must not cause thermal changes or deterioration of the insulating material.
- Must not cause damage to other control devices.
- Must not cause any harmful effect on people.
- Must not cause fire.

Therefore, be sure not to exceed the maximum voltage specified in the catalog.

As a rule, the rated voltage must be applied to the coil. A voltage exceeding the rated value, however, can be applied to the coil provided that the voltage is less than the maximum voltage. It must be noted that continuous voltage application to the coil will cause a coil temperature increase thus affecting characteristics such as electrical life and resulting in the deterioration of coil insulation.

### Coating

Relays mounted on PCBs may be coated or washed. Do not apply silicone coating or detergent containing silicone, otherwise the silicone coating or detergent may remain on the surface of the Relays.



**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. K117-E1-1 **In the interest of product improvement, specifications are subject to change without notice.**

## **OMRON Corporation**

Electronics Components Company

Electronic & Mechanical Components Division H.Q.

Low Signal Relay Division

2-1, 2-Chome, Nishikusatsu, Kusatsu-City,

Shiga, 525-0035 Japan

Tel: (81)77-565-5841/Fax: (81)77-565-5581

Printed in Japan

0701-2M (0701) (B)