


FUN-Sicherungseinsätze für Nennspannungen bis 125 V / **FUN**-Fuse links for rated voltage up to 125 V / **FUN**-Fusibles pour tension nom. jusqu'à 125 V

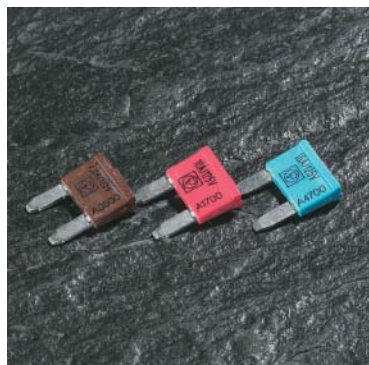

Isolierkörper / Insulating body / Corps Isolants:
aus Thermoplast / out of thermoplastic / de matière thermoplastique
(UL 94-V0, wärmeformbeständig / heat-resistant / résistante à la chaleur)


Abdeckung / Cover / Capuchon:
aus Thermoplast V0 / out of thermoplastic V0 / de matière thermoplastique V0
rot, nicht transparent / red, not transparent / rouge, pas transparent

Anschlüsse / Connections / Connexions:
Flachstecker / Blade contacts / Contacts plats
Kupferlegierung, gal. Sn / copper alloy, gal. Sn / alliage cuivreux, gal. Sn
kantengeschützt / edge-protected / bords protégés

Schaltvermögen / Breaking capacity / Pouvoir de coupure:
1.000 A, 125 V, DC


Artikel-Nr. Article-No. Réf. d'article	Nennstrom Rated current Intensité nom. I_N/I_{rat}	Kaltwiderstand Coldresistance Res. à froid R_k	Kennfarbe Colour-code Code couleur	Spannungsfall Voltage drop Chute de tension PUDENZ max. U_D	Schmelzintegral Joule integral Intégral de Joule I^2t
125.6785.430_	3 A	35,0 mΩ		130 mV	8,50 A²s
125.6785.440_	4 A	23,5 mΩ		120 mV	14,5 A²s
125.6785.450_	5 A	18,0 mΩ		120 mV	25,0 A²s
125.6785.475_	7,5 A	11,0 mΩ		110 mV	60,0 A²s
125.6785.510_	10 A	8,00 mΩ		110 mV	85,0 A²s
125.6785.515_	15 A	5,00 mΩ		110 mV	155 A²s

Schmelzeit-Grenzwerte / Pre-arcing time - limits / Temps de fusion limits

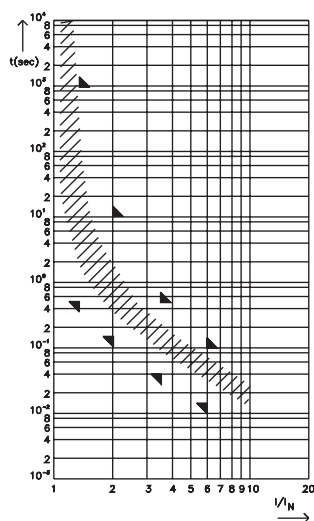

		min.	max.
$1,00 I_N / I_{rat}$	3 A - 15 A	100 h	-
$1,50 I_N / I_{rat}$	3 A - 15 A	500 ms	900 s
$2,00 I_N / I_{rat}$	3 A - 15 A	150 ms	10 s
$3,50 I_N / I_{rat}$	3 A - 15 A	40 ms	500 ms
$6,00 I_N / I_{rat}$	3 A - 15 A	15 ms	100 ms

Maße in mm / Dimensions in mm / Dimensions en mm

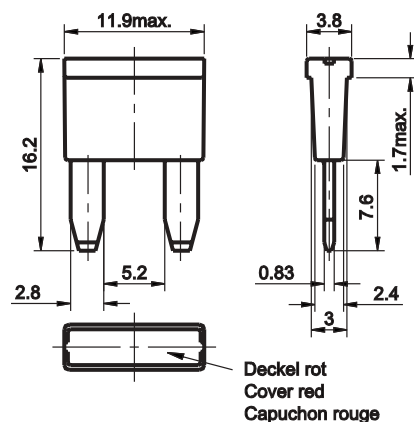

Normen / Specifications / Normes
PWN

$F_i = 1,43$ (max. Dauerstrom / max. operating current / max. courant permanent: $0,7 \times I_{rat}$ bei / at / à 23°C)